

MOL 2800 / 3400 / 4100 OIL BURNER


1708-4129 kW



- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- 2 stage or fully modulating operation
- Plug-in contact facilitates the installation
- All kW ratings are in nett CV

NU-WAY

Type		MOL 2800		MOL 3400		MOL 4100	
Capacity	kW	1708-2763		2768-3443		3453-4132	
Motor	V/Hz	400 / 50		400 / 50		400 / 50	
	kW / A (Fuse HRC)	2800-38	7.5 / 3 x 25	3400-36	7.5 / 3 x 25	4100-36	7.5 / 3 x 25
		2800-41	11 / 3 x 30	3400-41	11 / 3 x 30	4100-41	11 / 3 x 30
		2800-44	15 / 3 x 40	3400-44	15 / 3 x 40	4100-44	15 / 3 x 40
Start Run Current	Amps	2800-38	60 / 14.4	3400-36	57 / 15.6	4100-36	57 / 15.6
		2800-41	72 / 22.8	3400-41	72 / 22.8	4100-41	72 / 22.8
		2800-44	92 / 29.7	3400-44	92 / 29.7	4100-44	92 / 29.7
Control box		Satronic		Satronic		Satronic	
Fuel pump		Danfoss		Danfoss		Danfoss	
2-Stage		•		•		•	
Gross weight	kg	365		365		370	
Volume	m ³	1.872		1.872		1.872	

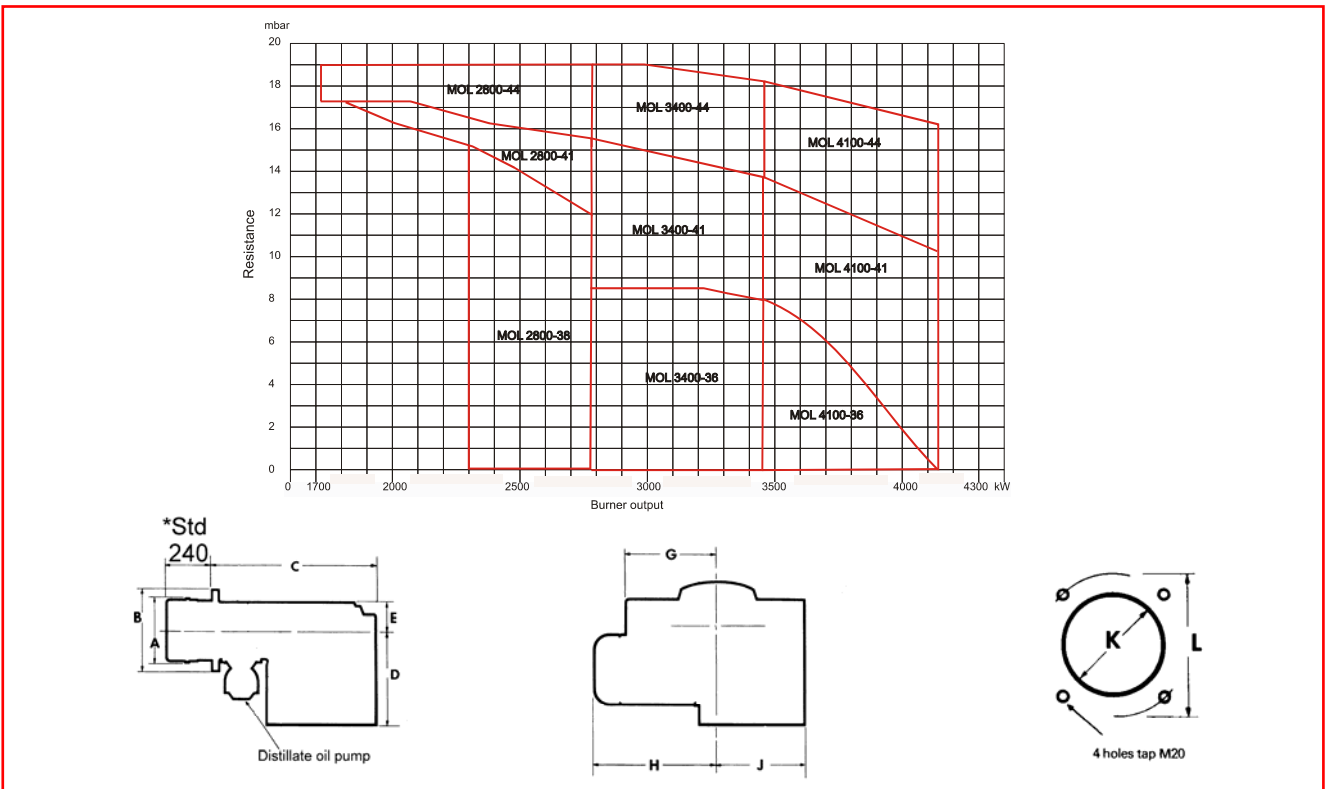

Burner	A	B	C	D	E	F	G	H	J	K	L PCD
MOL 2800-38 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 2800-41 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 2800-44 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 3400-36 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 3400-41 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 3400-44 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-36 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-41 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-44 T3S	325	420	910	500	145	600	535	545	435	330	454

* Extended Lengths Available

PLASMA ENERGY CO.,LTD.

98/13 MOO1 NAKORN RD. T.BANGKUWEANG
A.BANGKRUI. NONTABURI 11130 (THAILAND)

Tel: (662) 449-4900 (Auto)

FAX: (662) 496-2247

e-mail :info@plasma-energy.co.th

website : http://www.plasma-energy.co.th